

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
19 May 2005 (19.05.2005)

PCT

(10) International Publication Number  
**WO 2005/045508 A1**

(51) International Patent Classification<sup>7</sup>: **G02C 1/02** (74) Agent: PATENTGRUPPEN APS; Arosgaarden, Aaboulevarden 31, DK-8000 Aarhus C (DK).

(21) International Application Number:

PCT/DK2004/000784

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date:  
11 November 2004 (11.11.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
EP 03078561.2 11 November 2003 (11.11.2003) EP


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant and  
(72) Inventor: GROVE, Anders [DK/DK]; Tjørneagervej 7, DK-8220 Brabrand (DK).

Published:  
— with international search report

[Continued on next page]

(54) Title: RIMLESS SPECTACLES AND HINGE PIECES FOR RIMLESS SPECTACLES

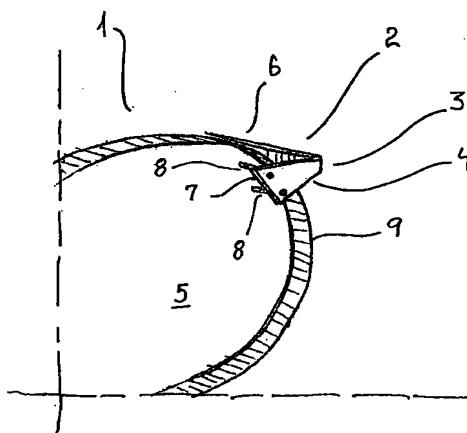

(57) Abstract: Rimless spectacles and hinge pieces are disclosed, where the hinge pieces each comprises an abutment part having an abutment surface extending parallel to and in substantial abutment with a side surface of the respective lens and at least two corresponding pins, that are fastened to the abutment part and extend into corresponding holding holes of the lenses. The pins are rigidly connected to the inner side surfaces of the corresponding holes, e.g. by gluing or by a close fit, preferably an interference fit, so that the pins substantially are prevented from gaining an angular displacement relatively to the holes in the lens. The two pins form together with the abutment part a three-sided contact area between the hinge piece and the lens, preferably a substantially unbroken contact area, i.e. that the pins extends from the abutment surface itself. A force or torque applied to the hinge piece is distributed over this contact area, since the construction substantially prevents any mutual movements or displacements between the hinge piece and the lens, and the stresses are consequently distributed and fatal stress concentrations leading to damages and fractures of the lens are avoided.

WO 2005/045508 A1

**WO 2005/045508 A1**



*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*